

SFP450 Series

450 W AC-DC Power Supply

Bel Power Solutions SFP450 Series is a 450 Watt, power factor corrected (PFC) front-end which provides a 12 VDC output for datacom and other distributed power applications. Its compact size enables mounting in both 1U and 2U height racks. High efficiencies, advanced thermal management techniques, and an internal fan increase reliability over a broad range of operating conditions. Internal ORing diodes facilitate use in hot-swap (plug)*, redundant configurations.

Status is provided with front panel LEDs, logic signals and via the I2C management interface bus.

The SFP450 Series meets international safety requirements and is CE marked to the Low Voltage Directive (LVD).



Key Features & Benefits

- Wide input voltage range (90-264 VAC) with PFC
- High power density, 9 W / inch³
- 1U or 2U height configurations
- Active current share with ORing FET
- IC interface status and monitoring
- Standby voltage of 3.3 VDC @ 3 A
- Overtemperature, overload, and overvoltage protection
- Status LEDs: AC OK, POWER GOOD, PS FAIL

Applications

- Datacom
- Distributed Power Systems

* Proper hot-swap (plug) operation instruction: Power supply is not intended to be inserted into the system with AC cord already applied. Alternatively, if there is an application where power supply insertion with AC cord is required; PS_ON must be toggled or AC recycled after insertion into the system to reset the power supply.

1. MODEL SELECTION

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	STANDBY OUTPUT	OUTPUT POWER
SFP450-12BG	100 – 240 VAC	12 VDC	36.6 A	3.3 V/ 3 A	450 W
SFP450-S101G*	100 – 240 VAC	12 VDC	36.6 A	3.3 V/ 3 A	450 W

*SFP450-S101G is the preferred version as the over temperature protection is independent of the current.

2. INPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
AC Input Voltage	Single-phase continuous input range.	90		264	VAC
Input Frequency	AC input.	47		63	Hz
Hold-up Time	After last AC line peak at full power.		At 115 VAC		ms
Input Current	At full-rated load.		At 90 VAC		6 Arms
Inrush Surge Current	Excluding Xcap. $V_{in} = 264$ VAC, $T = 25$ °C			15	Apk
Power Factor	Per EN61000-3-2		> 0.95		W/VA

3. OUTPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency ¹	With V_{in} at 110 VAC and 50% to 75% load on V1.	86			%
	With V_{in} at 110 VAC and 75% to 100% load on V1.	86			%
	With V_{in} at 220 VAC and 50% to 75% load on V1.	87			%
	With V_{in} at 220 VAC and 75% to 100% load on V1.	89			%
Minimum Load	Minimum loading required to maintain regulation.	0			A
Output Power				450	W
Overshoot	Output voltage overshoot at turn-on.			< 5	%
Transient Response	Maximum recovery time to within 1% of initial set point due to a 25% load change, 1A/ μ s.	12V output:		5	ms
		Standby output:		5	ms
Turn-On Delay with PS_ON Signal	Time required for initial output voltage stabilization after application of AC input or ON/OFF signal.	12V output:		3	%
		Standby output:		3	%
Output Regulation	See Model Selection table.			1500	ms

¹ Internal fan is considered part of the load as it is driven from the 12 V output; Vaux load is set to 0.5 A for efficiency measurements.

4. I²C BUS MANAGEMENT INTERFACE²

PARAMETER	CONDITIONS / DESCRIPTION	
Static	Includes static information such as: part number and revision level, output rating, serial number, date code, and manufacturing location.	
Status (Logic 1 or 0)	AC Input OK. DC Output OK. Overtemperature. Overcurrent.	Fan OK. Overvoltage Alert Undervoltage Alert
Real-Time Monitoring	Output voltage (main output). LSB = 20 mV Output current (main output). LSB = 50 mA	

5. INTERFACE SIGNALS & INTERNAL PROTECTION³

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS	
Overvoltage Protection	Latch-style overvoltage protection.			15 4.3	V	
Overcurrent Protection	Current limit (Latching Mode).		12 V output: Standby output:	38.4 3.2	47. 6.6	A
Short-Circuit Protection	Latching Mode.					
Overtemperature/ Fan Failure Warning	12 V output will shut down in the event of an overtemperature condition or blocked fan rotor. OT setpoint is 62 ±3°C. Supply's fan and Vaux are active. Power supply will recover when OT condition is removed. Amber OT LED will turn ON to indicate fault condition.					
PS_KILL	Output enable. Pulled low on conjunction with PS_ON being pulled low allows V1 to be activated. PSKILL will cause the PSU to latch off the 12 V rail, the latch can be cleared by recycling PSON or recycling the AC supply.					
+12V Current Share	0 to 8V signal used for active current sharing.					
Write Protect	For factory use only.					
PS A0	I ² C Address.					
SDA	I ² C Data line (3.3 V).					
SCL	I ² C Clock line (3.3 V).					
Tach	Two pulses per fan revolution.					
AC_OK/H	High signal indicates AC is within PSU limits.					
Present/L	100 Ohm resistor internally connected to RTN allowing the PSU to be detected on insertion.					
Alert/L	Low signal indicates PSU fan is running below speed or an overtemperature limit was exceeded.					
PWROK/H	High signal indicates both outputs are within regulation limits.					

² Reference "I²C Management Interface" and "EEPROM Table of Contents" documents for SFP450-12BG (consult factory).

³ Refer to product specification for internal pull up impedances and timing of these signals.

6. SAFETY REGULATORY AND EMI SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards: UL/CSA60950-1, IEC60950-1 and EN60950-1. CE Mark for LVD				
Electromagnetic Interference	FCC CFR title 47 Part 15 Sub-Part B, EN55022/CISPR 22.	Conducted: Radiated:	A A		Class
Harmonics	Per IEC61000-3-2.		A		Class
Voltage Fluctuation and Flicker	Per IEC61000-3-3.		Pass		
ESD Susceptibility	Per EN 61000-4-2, Level 4 Performance criteria A	Contact Discharge: Air Discharge:	±8 ±15		kV
Radiated Susceptibility	Per EN 61000-4-3, Level 3, Performance criteria A		10		V/M
EFT/Burst	Per EN 61000-4-4, Level 4 Performance criteria A		±4		kV
Input Transient Protection	Per EN 61000-4-5, Class 3 Performance criteria A	Line-to-Line: Line-to-Ground:	1 2		kV
RF Conducted Disturbances	Per EN 61000-4-6, Level 2, Performance criteria A		3		V
Voltage Interruptions	Per EN 61000-4-11, performance criterion B 30%. Per EN 61000-4-11, performance criterion C 60%. Per EN 61000-4-11, performance criterion C 95%.		10		ms
			100		ms
			5		sec
Voltage Sag Immunity	Per SEMI F47-0999 > 100 VAC. No output voltage interruption.				
Leakage Current	Per EN60950.	At 240 VAC:		1.75	mA

7. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating.			10K	ASL ft
	Non-Operating.			40K	
Operating Temperature	Internal DC fan for cooling.	At 100% load:	0	50	°C
Storage Temperature			-40	85	°C
Temperature Coefficient	0 °C to 45 °C (after 15-minute warm-up).			0.02	%/°C
Relative Humidity	Non-condensing.			95	%RH
Shock	Operating: half-sine, 11 ms, 3-axis.			±10	Gpk
Vibration	Operating: swept sine 5-500 Hz.			2	Gpk
	Non-operating: random 10-2000 Hz.			6.15	Grms
Reliability MTBF	(Calculated) MILHDBK 217F Ground Benign.		100 000		hrs
	Demonstrated.		200 000		hrs
	Useful Life		10		yrs

8. LED INDICATORS

INDICATOR	LED COLOR
Power Good	GREEN
AC OK	GREEN (Input > 85 VAC)
PS FAIL	AMBER

9. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	1.46 kg (3.22 lb)
Dimensions	78 x 40 x 337.4 mm



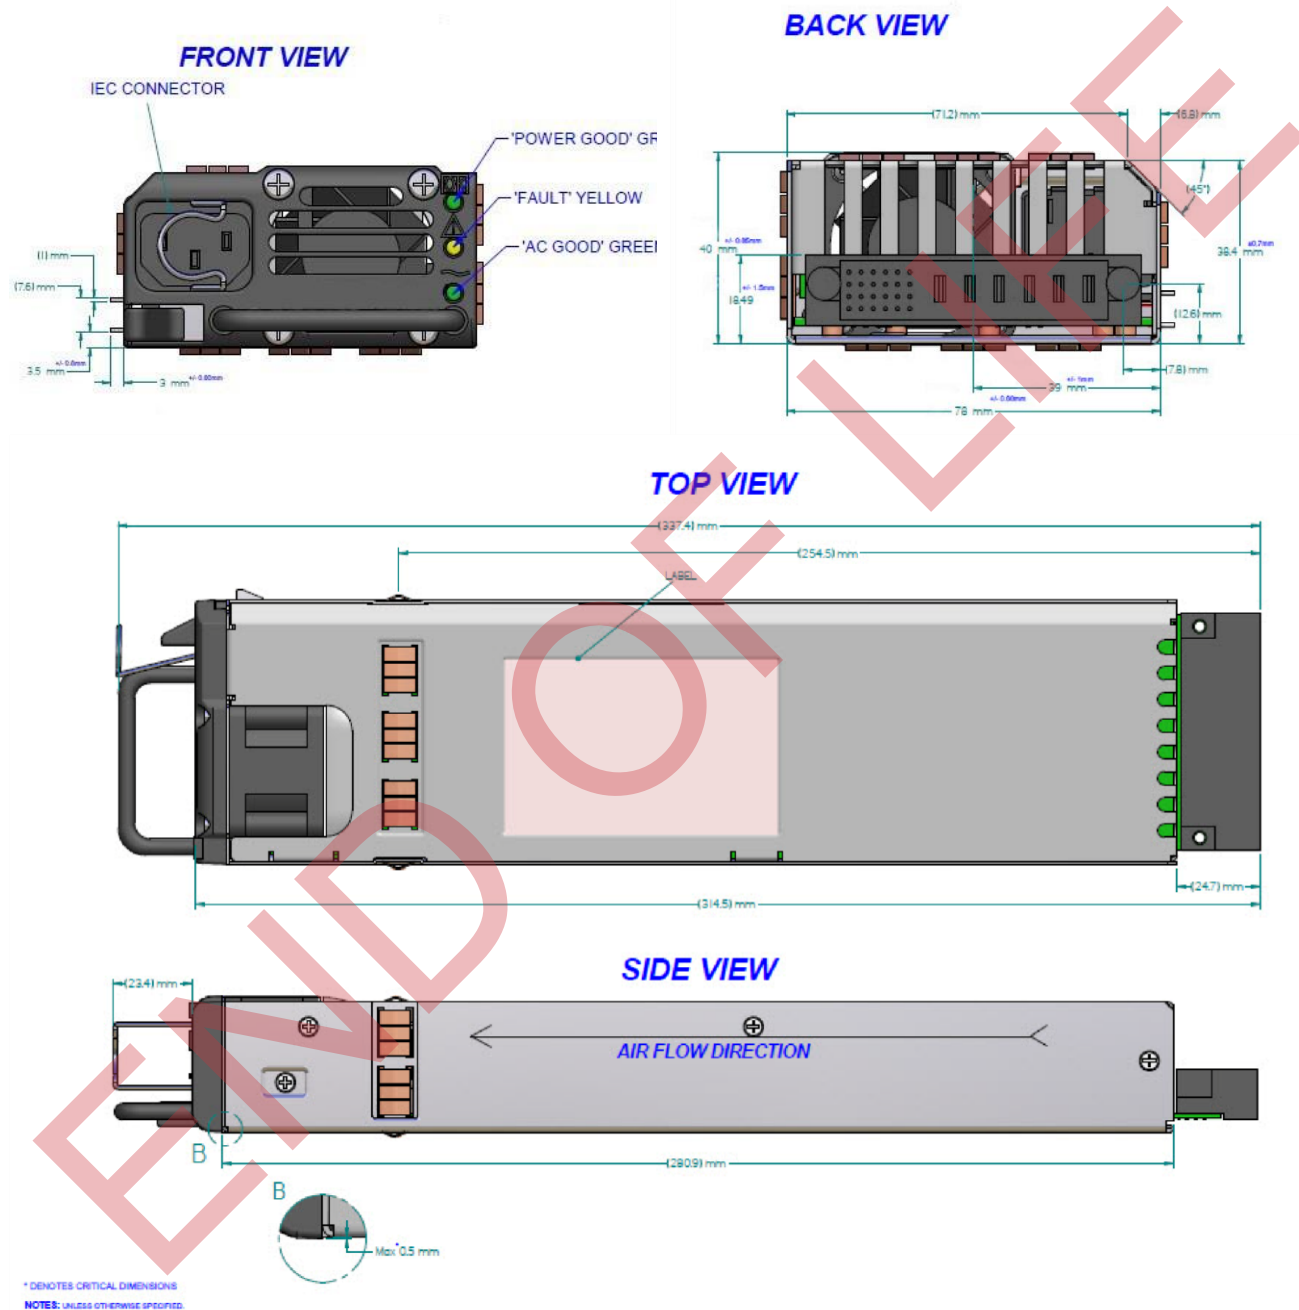


Figure 1. Mechanical Drawings

10. CONNECTOR & PIN DESCRIPTIONS

Power Supply:	Input - IEC 320 input (Male) standard line cord connection Output - P/N FCI 51721-10002406AA or equivalent								
Mating Connections:	Input - IEC 320 output (Socket) Standard line cord (15A) Output - P/N: FCI 51741-10002406CC								
Input IEC Connector:	<table border="1"> <thead> <tr> <th>Input</th> <th>Location</th> </tr> </thead> <tbody> <tr> <td>Chassis (Safety) Ground</td> <td>Ground</td> </tr> <tr> <td>Line 1 (Line)</td> <td>L</td> </tr> <tr> <td>Line 2 (Neutral)</td> <td>N</td> </tr> </tbody> </table>	Input	Location	Chassis (Safety) Ground	Ground	Line 1 (Line)	L	Line 2 (Neutral)	N
Input	Location								
Chassis (Safety) Ground	Ground								
Line 1 (Line)	L								
Line 2 (Neutral)	N								

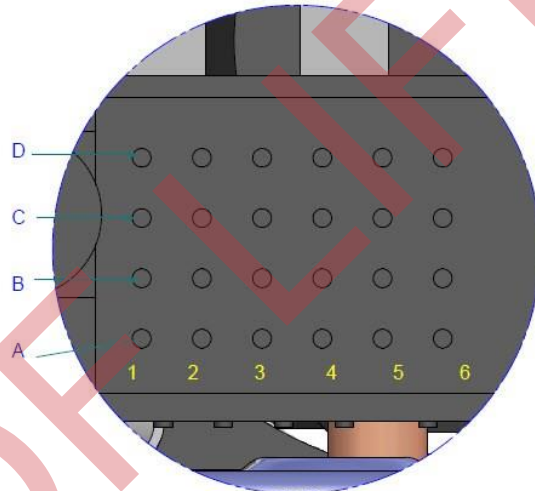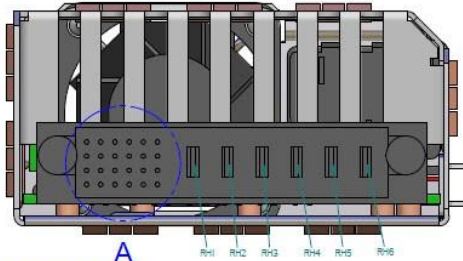

DETAIL A

OUTPUT CONNECTOR:

FCI (POWER BLADE)
51721-10002406AC OR EQUIVALENT

WILL MATE WITH SYSTEM
BOARD CONNECTOR:

FCI (POWER BLADE)
5174-10002406AA
5174-10002406BA
5174-10002406CB

STRAIGHT IN
CONNECTOR

FCI (POWER BLADE)
51761-10002406AA
51761-10002406BA
51761-10002406CB

RIGHT ANGLE
CONNECTOR

PIN	SIGNAL NAME
Rh1	+12V Return
Rh2	+12v Return
Rh3	+12v Return
Rh4	+12v
Rh5	+12v
Rh6	+12v
A1	PS KILL
A2	+12v Current Share
A3	RETURN
A4	EEPROM-WP
A5	PS A0
A6	+3.3V SB
B1	RETURN
B2	Spare
B3	RETURN
B4	+3.3v SB
B5	SDA
B6	PSON/L
C1	RETURN
C2	Tach 1
C3	RETURN
C4	+3.3v SB
C5	SCL
C6	ACOK/L
D1	Present/L
D2	Spare
D3	RETURN
D4	+3.3V SB
D5	Alert/L
D6	PWROK/H

NOTES: UNLESS OTHERWISE SPECIFIED:

WILL MATE WITH SYSTEM
BOARD CONNECTOR:

FCI (POWER BLADE)
5174-10002406AA
5174-10002406BA
5174-10002406CB

STRAIGHT IN
CONNECTOR

FCI (POWER BLADE)
51761-10002406AA
51761-10002406BA
51761-10002406CB

RIGHT ANGLE
CONNECTOR

FCI 51761-10002406
FCI 5174-10002406 A A
B A
C B

"A" = .135 +/- .010 (3.43 +/- 0.25) SOLDER TO BOARD.
"B" = .090 +/- .005 / -.010 (2.29 +/- 0.13 / -0.25) SOLDER TO BOARD
"C" = .154 +/- .010 (3.91 +/- 0.25) PRESS FIT TO BOARD

"A" = BOARD LOCK (REQUIRES .098 + .002/- .001
(2.49 + 0.05 / - 0.03) THRU HOLE IN PCB
MOUNTING FOOT HEIGHT: .220 (5.59)
** NOT AVAILABLE FOR PRESS FIT **
"B" = .150 (3.81) THRU HOLE (REQUIRES .158 +/- 0.003
(4.01 +/- 0.08) THRU HOLE IN PCB)
MOUNTING FOOT HEIGHT: .160 (4.06)
** ALWAYS FOR PRESS FIT **

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

END OF LIFE



bel POWER
SOLUTIONS &
PROTECTION
a bel group

Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200